


WINDOW SCHEDULE							
#	SIZE	DESCRIPTION	QTY	HEADER	JACKS	KINGS	HEADER HEIGHT
Ⓐ	36X60	V/S BZ/CL INSUL. W/ MINI BLINDS	9	DBL 2X4	1	1	80" HEADER HEIGHT

DOOR SCHEDULE							
#	SIZE	DESCRIPTION	QTY	HEADER	JACKS	KINGS	COMMENTS
①	36X80	STEEL/ STEEL FRAME/6X30 V.B	2	DBL 2X6	1	1	
TELL GRADE 2 KEYED LEVER,LATCH GUARDS, CLOSER, ADA THRESHOLD / WEATHER STRIPPING							
②	36X80	S/C PRE-FINISHED IMPERIAL OAK REDIFRAME	2	2X4	1	1	
GRADE 1 PRIVACY LEVER							
③	36X80	S/C PRE-FINISHED IMPERIAL OAK REDIFRAME	4	2X4	1	1	
GRADE 1 KEYED LEVER LOCKS							

Ⓙ THE FLOOR AND ROOF DESIGN OF THIS PLAN IS "LIGHT FRAME" TRUSS TYPE CONSTRUCTED AS REFERENCE IN FAC RULE 69-3.012 (6). POSTING OF NOTICE SIGN(S) AS REQUIRED BY FAC 69A-3.012(6) SHALL BE INSTALLED ON SITE BY OTHERS. THE SYMBOLS MUST BE INSTALLED WITHIN 24" TO THE LEFT SIDE OF THE MAIN ENTRANCE OF THE FACILITY. IT MUST BE LOCATED BETWEEN 4 FEET AND 6 FEET ABOVE THE FINISHED FLOOR.

Ⓜ TACTILE SIGNAGE SHALL NE LOCATED ON EITHER SIDE OF THE DOORS AT ALL EXITS, INSTALLED ON SITE BY OTHERS.

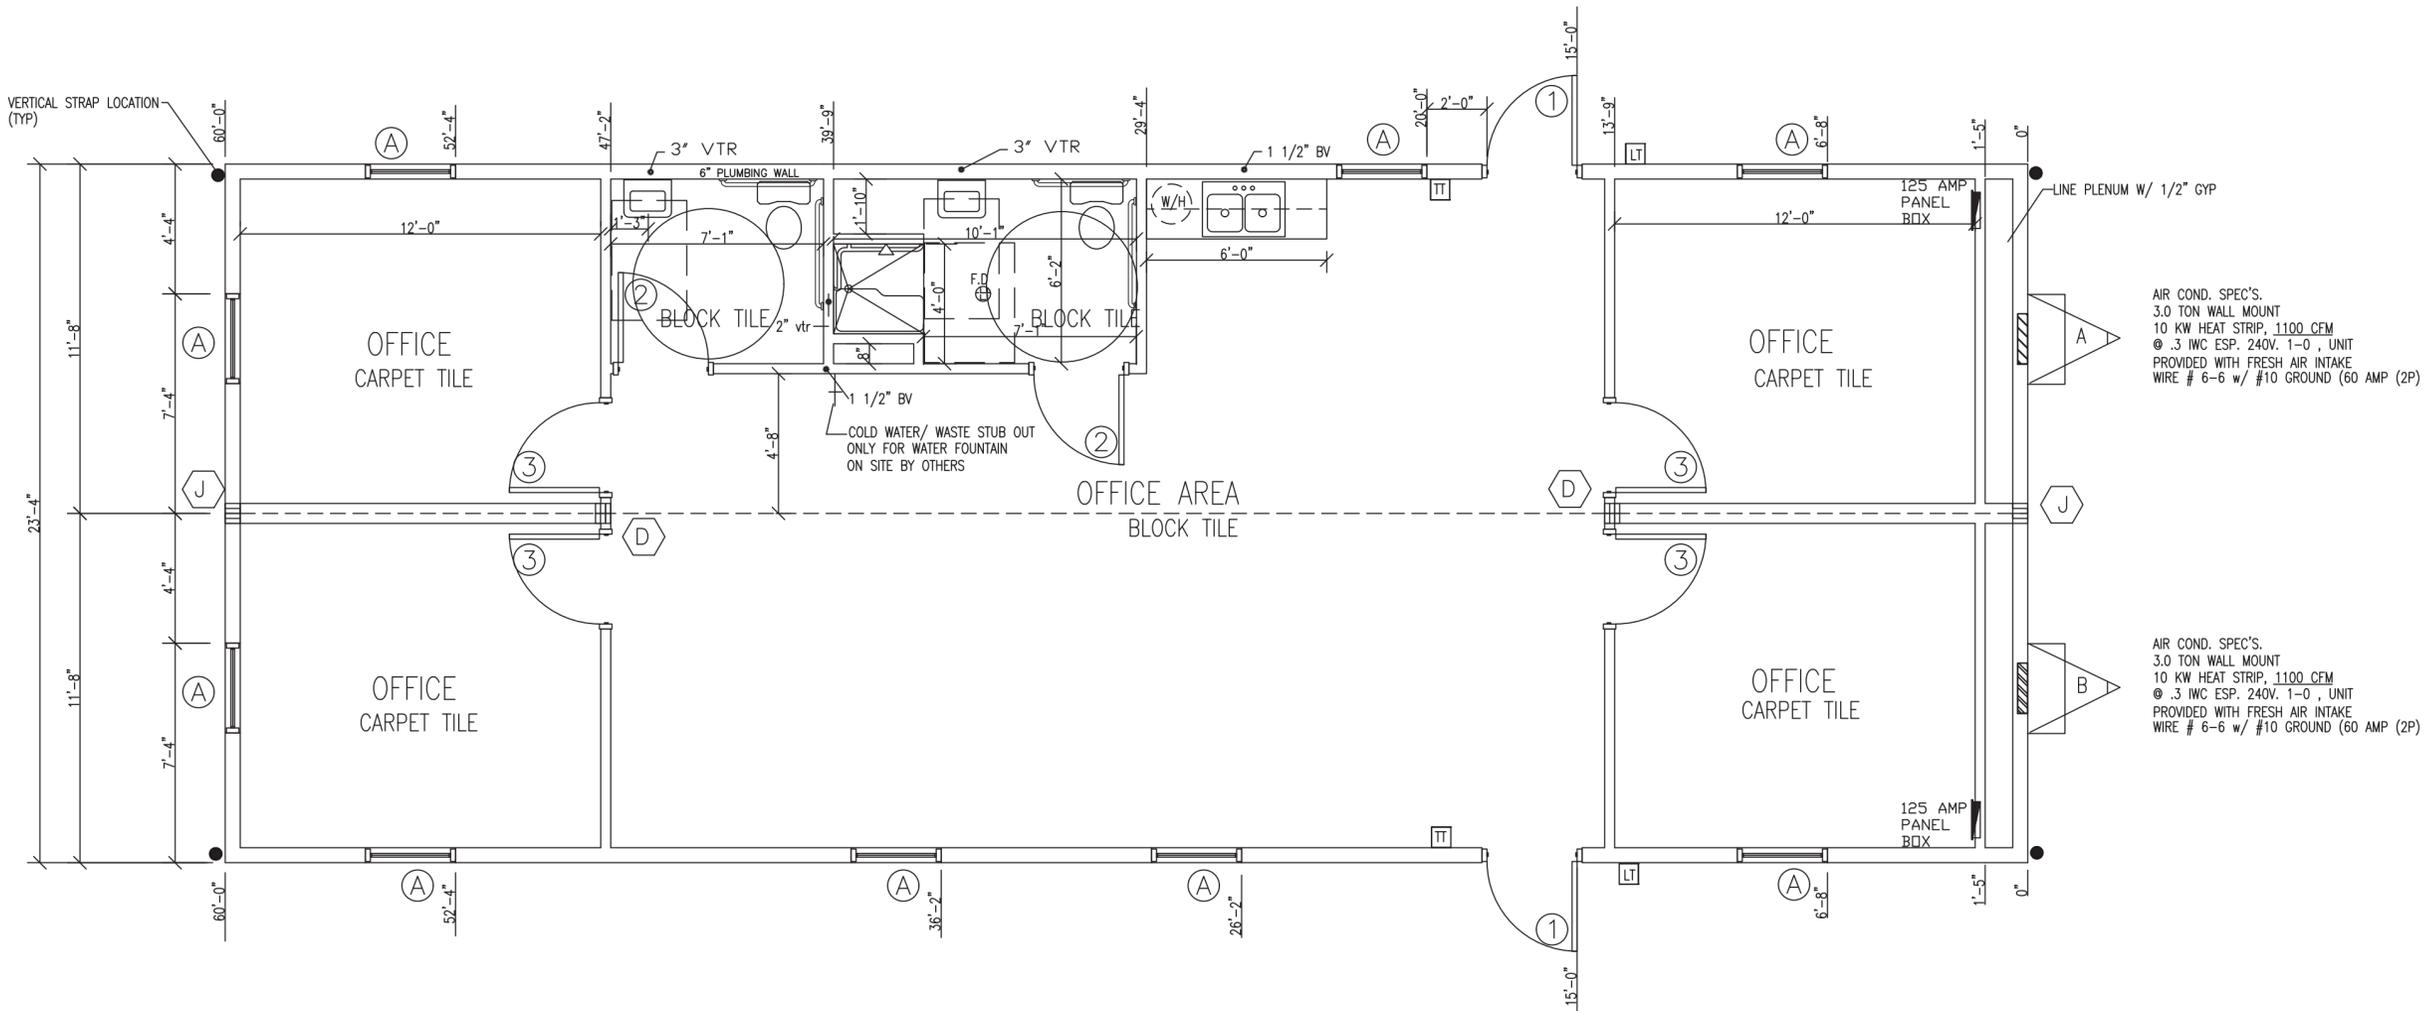

DEALER: MBSI
24X60 STOCK
SERIAL No. 20174 A/B
FLOOR PLAN

REVISIONS	
1	04/01/19

Southeast Modular Manufacturing
1619 GA. HWY 26 WEST
ELLAVILLE, GA. 31806

DRAWN BY: B.H
CHECKED BY: K.E.D
DATE: 03/27/2019
SCALE: 1/4"=1'-0"
EMC #SMM 20174
SERIAL# 20174 A/B

SHEET:
3 OF 8

STANDARD	COLUMN STRAPPING SCHEDULE			
Ⓐ	(2) 2x4 SYP#2 (THIS HALF)	Ⓑ	(2) 2x4 SYP#2 (EACH HALF)	
Ⓒ	(3) 2x4 SYP#2 (THIS HALF)	Ⓓ	(3) 2x4 SYP#2 (EACH HALF)	
Ⓔ	(4) 2x4 SYP#2 (THIS HALF)	Ⓕ	(4) 2x4 SYP#2 (EACH HALF)	
Ⓖ	(5) 2x4 SYP#2 (THIS HALF)	Ⓗ	(5) 2x4 SYP#2 (EACH HALF)	
Ⓛ	(2) 2x6 SYP#2 (THIS HALF)	Ⓜ	(2) 2x6 SYP#2 (EACH HALF)	
Ⓚ	(3) 2x6 SYP#2 (THIS HALF)	Ⓝ	(3) 2x6 SYP#2 (EACH HALF)	
Ⓜ	(4) 2x6 SYP#2 (THIS HALF)	Ⓟ	(4) 2x6 SYP#2 (EACH HALF)	

NOTES:
ALL COLUMN STUDS SHALL BE GLUED/NAILED TOGETHER
P.V.A. GLUE W/ 100% COVERAGE SHALL BE USED.
INSTALL TWO (2) STEEL STRAPS AT EACH STUD OF EACH COLUMN
COLUMN STUDS SHALL NOT BE NOTCHED OR BORED.
STEEL STRAPS SHALL BE (2) 26 GA. x 1 1/2" FASTENED WITH (14)
16 GA. x 7/16" CROWN x 1 1/4" STAPLES PER DOUBLE STRAP
END OR EQUAL, FROM RIDGE BEAM TO COLUMN AND COLUMN TO FLOOR.
* = BEARING STIFFENER

RIDGE BEAM SPECS		
UNIT	LOCATION	LAYERS
A	A-SIDEWALL	2 LAYERS 3/4" x 24"
	A-B	4 LAYERS 3/4" x 24"
B	B-A	4 LAYERS 3/4" x 24"
	B-SIDEWALL	2 LAYERS 3/4" x 24"

APA RATED PLYWOOD, EXP.1, STRUCT. 1,
5 PLY, 5 LAYER, 48/24

Reviewed By:
Robert A. Johnson
Florida Modular Plans Examiner
No. SMP - 000029

LISTING AGENCY APPROVAL	
THESE PRINTS COMPLY WITH THE FLORIDA MANUFACTURED BUILDING ACT OF 1979 CONSTRUCTION CODE AND ADHERE TO THE FOLLOWING CRITERIA	
CONST. TYPE	V-B
OCCUPANCY	B-BUSINESS
RISK CATEGORY	II
WIND VELOCITY (ULT)	160 MPH
WIND VELOCITY (ASD)	124 MPH
FIRE RATING OF EXT. WALLS	0
PLAN NO.	SMM-20174
ALLOW. FLOOR LOAD	50 PSF
APPROVAL DATE	
MANUFACTURER	SMM
HIGH VELOCITY HURRICANE ZONE	NO
E.M.C.	

KENNETH E. DUNMON
CONSULTING ENGINEER
195 TOMMY HOOKS RD.
AMERICUS, GA. 31709

THIRD PARTY: Expert Modular Consultants, LLC.
13103 W/ LINEBAUGH AVE.
SUITE 102
Tampa, Florida 33626