


WINDOW SCHEDULE							
#	SIZE	DESCRIPTION	QTY	HEADER	JACKS	KINGS	HEADER HEIGHT
A	36X54	V/S WHITE/ LOW-E INSULATED W/ MINI BLINDS	8	DBL 2X6	1	1	80" HEADER HEIGHT

DOOR SCHEDULE							
#	SIZE	DESCRIPTION	QTY	HEADER	JACKS	KINGS	COMMENTS
1	36X80	INSUL. STEEL/ STEEL FRAME/ 6X30 V.B	2	DBL 2X4	1	1	
		FALCON GRADE 1 KEYED LEVER, CLOSER, ADA THRESHOLD / WEATHER STRIPPING					
2	36X80	S/C PRE FINISHED REDIFRAME	1	2X4	1	1	
		PRIVACY LEVER					
3	36X80	S/C PRE FINISHED REDIFRAME	2	2X4	1	1	
		PASSAGE LEVER					

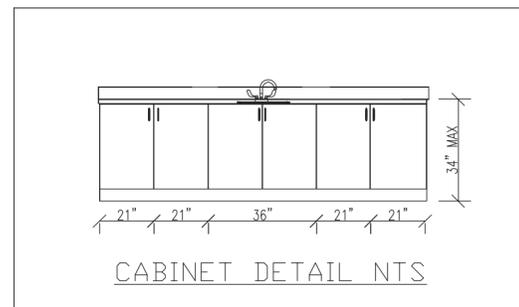


LISTING AGENCY APPROVAL	
THESE PRINTS COMPLY WITH THE FLORIDA MANUFACTURED BUILDING ACT OF 1979 CONSTRUCTION CODE AND ADHERE TO THE FOLLOWING CRITERIA.	
CONST. TYPE	VB
OCCUPANCY	B
ALLOWABLE NO. OF FLOORS	1
RISK CATEGORY	II
WIND VELOCITY (ULT)	160
WIND VELOCITY (ASD)	124
FIRE RATING OF EXT. WALLS	0
PLAN NO.	1578-5301 F
ALLOW. FLOOR LOAD	50
APPROVAL DATE	4-30-18
MANUFACTURER	SMM
HIGH VELOCITY HURRICANE ZONE	NO

STANDARD COLUMN STRAPPING SCHEDULE			
A	(2) 2x4 SYP#2 (THIS HALF)	B	(2) 2x4 SYP#2 (EACH HALF)
C	(3) 2x4 SYP#2 (THIS HALF)	D	(3) 2x4 SYP#2 (EACH HALF)
E	(4) 2x4 SYP#2 (THIS HALF)	F	(4) 2x4 SYP#2 (EACH HALF)
G	(5) 2x4 SYP#2 (THIS HALF)	H	(5) 2x4 SYP#2 (EACH HALF)
I	(2) 2x6 SYP#2 (THIS HALF)	J	(2) 2x6 SYP#2 (EACH HALF)
K	(3) 2x6 SYP#2 (THIS HALF)	L	(3) 2x6 SYP#2 (EACH HALF)
M	(4) 2x6 SYP#2 (THIS HALF)	N	(4) 2x6 SYP#2 (EACH HALF)

NOTES:
ALL COLUMN STUDS SHALL BE GLUED/NAILED TOGETHER
P.V.A. GLUE W/ 100% COVERAGE SHALL BE USED.
INSTALL TWO (2) STEEL STRAPS AT EACH STUD OF EACH COLUMN
COLUMN STUDS SHALL NOT BE NOTCHED OR BORED.
STEEL STRAPS SHALL BE (2) 26 GA. x 1 1/2" FASTENED WITH (14) 16 GA. x 7/16" CROWN x 1 1/4" STAPLES PER DOUBLE STRAP
END OR EQUAL, FROM RIDGE BEAM TO COLUMN AND COLUMN TO FLOOR.
* = BEARING STIFFENER

RIDGE BEAM SPECS		
UNIT	LOCATION	LAYERS
A	A-SIDEWALL	2 LAYERS 3/4" x 24"
	A-B	3 LAYERS 3/4" x 24"
B	B-A	3 LAYERS 3/4" x 24"
	B-SIDEWALL	2 LAYERS 3/4" x 24"

APA RATED PLYWOOD, EXP.1, STRUCT. 1,
5 PLY, 5 LAYER, 48/24



JAMES BRADLEY P.E.
CONSULTING ENGINEER
212 FOX TRAIL
PARKESBURG, PA. 19365

THIRD PARTY: HILBORN, WERNER, CARTER & ASSOCIATES
1627 SOUTH MYRTLE AVE.
CLEARWATER, FLORIDA 33756

DEALER: MBSI
OES EQUIPMENT OFFICE
SERIAL No. 19722 A/B
FLOOR PLAN

REVISIONS	
HWC	04-26-18

Southeast Modular Manufacturing
2500 INDUSTRIAL STREET
LEESBURG, FLORIDA 34748

DRAWN BY: BARBARA
CHECKED BY:
DATE: 04/02/2018
SCALE: 1/4"=1'-0"
HWC # 1578-5301 F
SERIAL# 19722 A/B

SHEET:
3 OF 7